


Capacity approx.
15 to 90 MW heat rejected

Short payback period &
lower CAPEX


Modular & compact design

Heat Rejection & Heat Recovery Solutions

STANDARDISED AIR COOLED CONDENSERS (ACX)

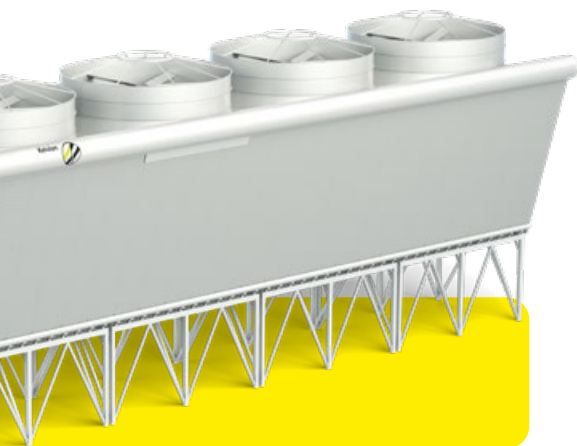

ACX IN PROCESS

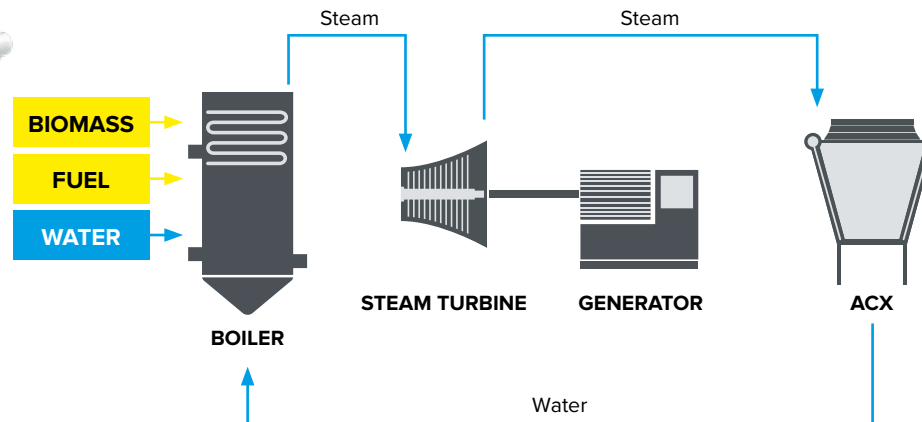

DESIGN PARAMETER



DESIGN PRESSURE

1 barg
14 psi



DESIGN TEMPERATURE

120 (150) °C

MARKETS



Waste to
Energy



Power




Heavy & Light
Industry




Biomass


COMBINE UP TO FOUR MODULES



THREE DIFFERENT FAN DIAMETERS

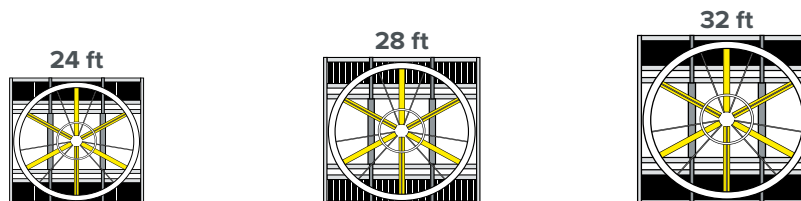

DESIGN BENEFITS



Up to 20%
less power
consumption



30% less
structural steel



20% less
erection work